

Programmable DC Electronic Loads
HVL Series



The HVL Series DC electronic loads offer a wide operating voltage up to 1000 V and high power density providing 6 kW in a 5U form factor. Suitable for ATE system applications, this series supports a variety of dynamic loading conditions for evaluating DC-DC converters, batteries, battery chargers, photovoltaic arrays, and other high power DC sources.

In addition to CC/CV/CR/CW operating modes, the HVL Series features continuous, pulse, and toggle transient operations to precisely switch between two load levels. Advanced list mode programming makes it easy to set up and execute complex load sequences from the front panel. For applications requiring more power, up to 10 identical HVL Series models can be combined in parallel to increase total sink capabilities to 60 kW.

Operating software provides remote instrument control and monitoring from a PC. Separate battery test software simplifies battery discharge testing with data logging. Built-in remote PC interfaces include USB (USBTMC-compliant), LAN, RS232, and GPIB supporting SCPI commands. The front panel USB host port enables data logging directly to a connected flash drive.

Special Applications

The HVL Series wide operating voltage range and high power capabilities make it a comprehensive solution for electric vehicle (EV) batteries, on-board EV chargers, and charging station test applications.




- Features and benefits**
- High power density up to 6 kW in a 5U form factor
 - CC/CV/CR/CW operating modes
 - Continuous, pulse, and toggle transient operation
 - Transient mode speed up to 10 kHz in CC mode
 - Thermostatically-controlled fans for quiet operation
 - Advanced list mode programming
 - Adjustable loop response speed
 - Overvoltage (OVP), overcurrent (OCP), overpower (OPP) protection, reverse voltage, and key lock function
 - Short-circuit test
 - Adjustable voltage/current slew rate
 - Soft start function to prevent sudden voltage/current spikes
 - Oscillation protection
 - Front panel USB host port for logging measurement data
 - Save/recall instrument settings to internal memory
 - External analog control and monitoring
 - Operating software and battery test software provided
 - 4.3-inch LCD screen
 - USB, LAN, RS232, and GPIB interfaces standard
 - LabVIEW™ driver provided
 - Remote sense
 - Rack-mount brackets with handles included
 - cTUVus certification mark fulfills CSA and UL safety standards

Power	2 kW		3 kW			6 kW			
Model	HVL150250	HVL150480	HVL600150	HVL80075	HVL100025	HVL150750	HVL600300	HVL800150	HVL100050
Rated Voltage	150 V	150 V	600 V	800 V	1000 V	150 V	600 V	800 V	1000 V
Rated Current	250 A	480 A	150 A	75 A	25 A	750 A	300 A	150 A	50 A
Form Factor	3U					5U			

Operation highlights

Advanced list mode

The HVL Series list mode is highly configurable for generating precise load sequences.

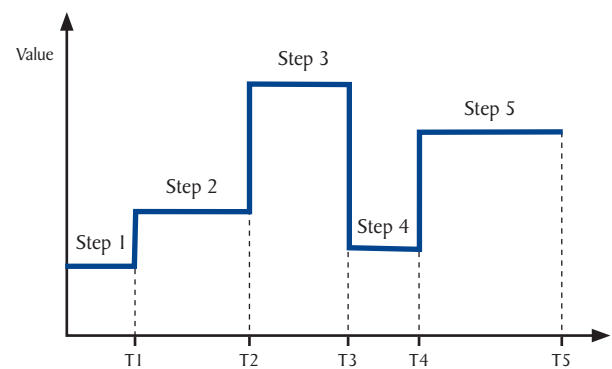


Each list mode program contains up to 100 user programmable steps. Save up to 10 list mode programs directly to internal memory for quick recall. Step parameters include level value, step duration, and step triggers. List mode programs can be set to repeat a maximum of 100,000 times. BOST / EOST (Beginning / End of Step Trigger) can be enabled for any step in the list to generate output triggers for synchronizing events with other externally connected instruments. List mode programs can be configured and run from the front panel or remotely using the provided application software.



List mode configuration menu

Direct data logging

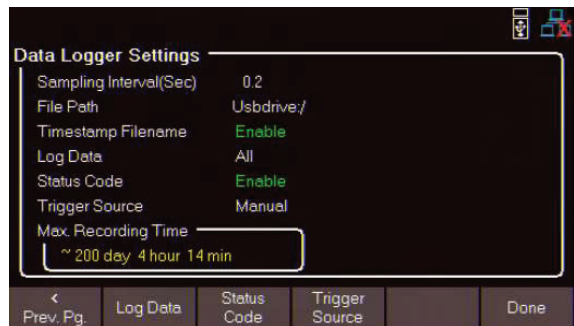


Log voltage, current, or both at a user-defined sampling interval adjustable from 0.2 seconds to 5 minutes directly to an external USB flash drive. Data points are saved as a CSV file with date and time stamp.

Transient operation

Transient operation enables the DC load to periodically switch between two load levels.


Transient - continuous

Switch continuously between A and B load current levels where rise/fall slew rates and level width can be adjusted.

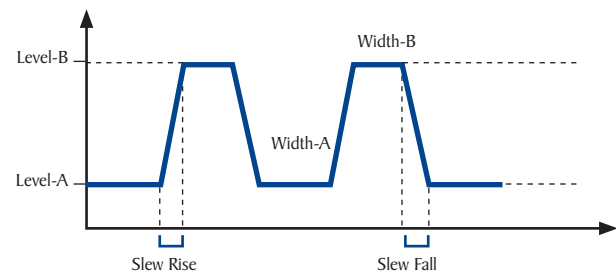


Transient - pulse

Upon enabling the input, the load executes one pulse cycle returning to Level-A, and waits to receive a trigger signal before executing another pulse.

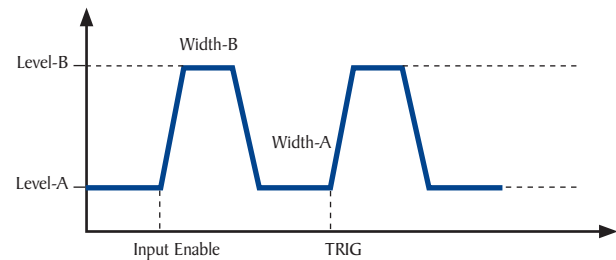

Transient - toggle


The DC load current will switch between Level-A and Level-B following receipt of a trigger signal.

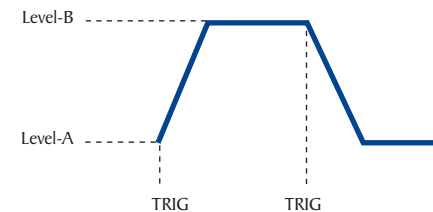


Operation highlights

Rise and fall time measurement

The HVL Series can measure the rise or fall time from a specified start and stop voltage level of the measured input without the need for an external oscilloscope. The figure below illustrates how rise time is measured based on the two user-configured voltages.

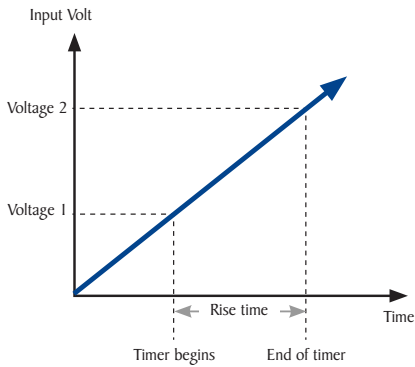


The resulting rise/fall time measurement is displayed on screen with 0.1 s resolution.

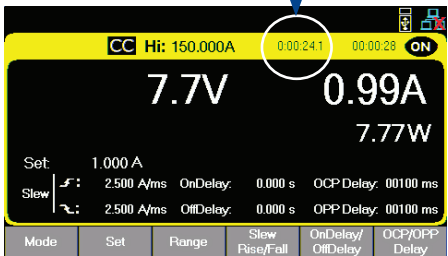

Parallel operation


For applications requiring more power, up to 10 identical HVL Series DC load models can be connected in parallel to increase the maximum sink power to 60 kW. Once configured, the connected units will display voltage and current of the complete system.

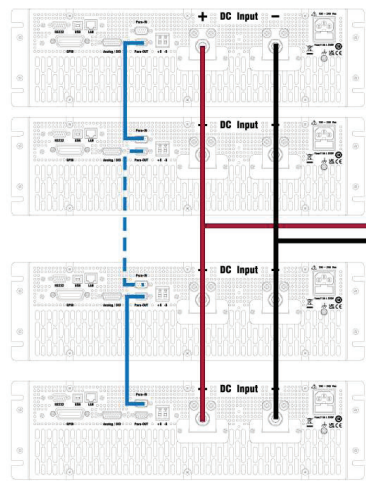

Sink up to 60 kW with 10 instruments connected in parallel.

Low voltage operation

The HVL Series can operate at low voltages for applications in fuel cell and solar cell testing.

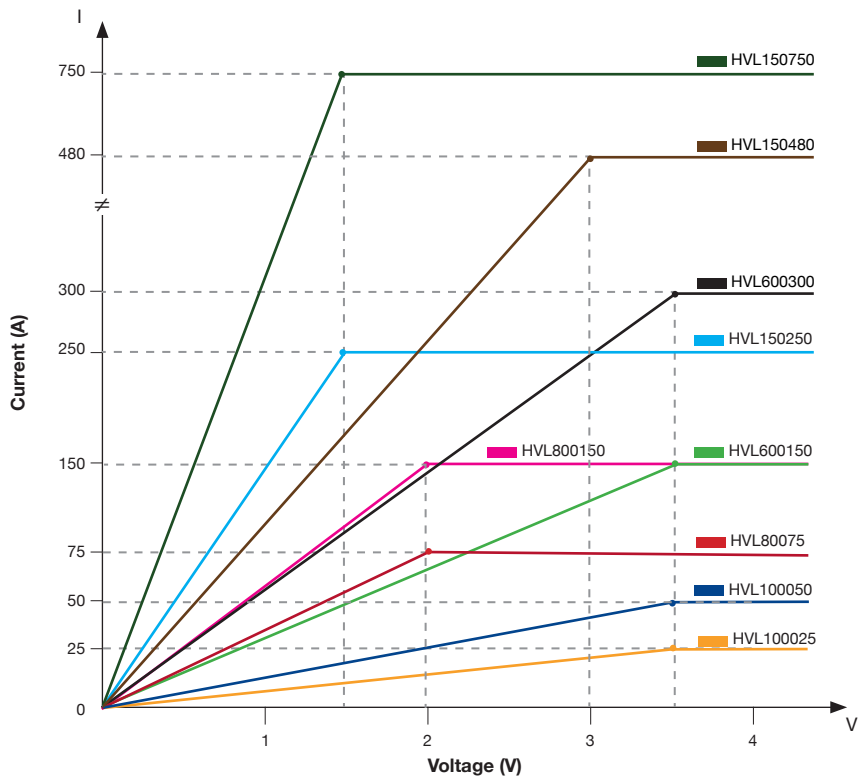


Typical minimum operating voltage at full scale current								
HVL150250	HVL150480	HVL600150	HVL80075	HVL100025	HVL150750	HVL600300	HVL800150	HVL100050
1.5 V	3.0 V	3.5 V	2.0 V	3.5 V	1.5 V	3.5 V	2.0 V	3.5 V

Operation highlights

Application software

PC software is provided for generating and executing test sequences and measurement data logging without the need to write source code.

- Log voltage, current, power measurements and export data in spreadsheet format for further analysis
- Configure and run transient operation, list mode, and more

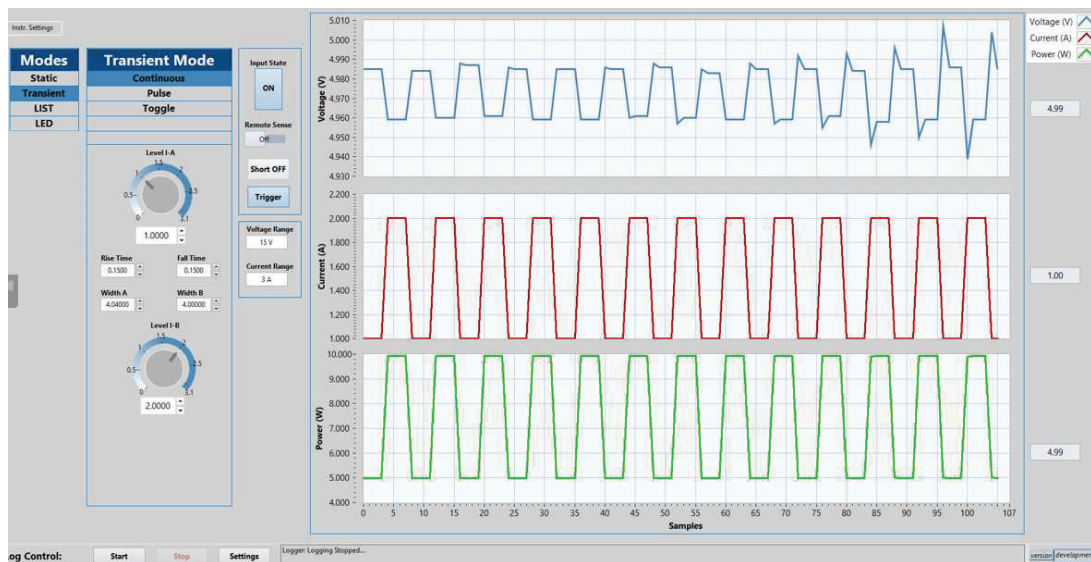

HVL Series Operating Software

Battery test software

Supplementary PC software available at bkprecision.com simplifies battery testing with the ability to create discharge sequences and log data. Couple the HVL Series with a compatible external power supply, to perform battery charge/discharge cycle tests on batteries.



Log charge and discharge data


Front panel

3U model shown



Rear panel

3U model shown

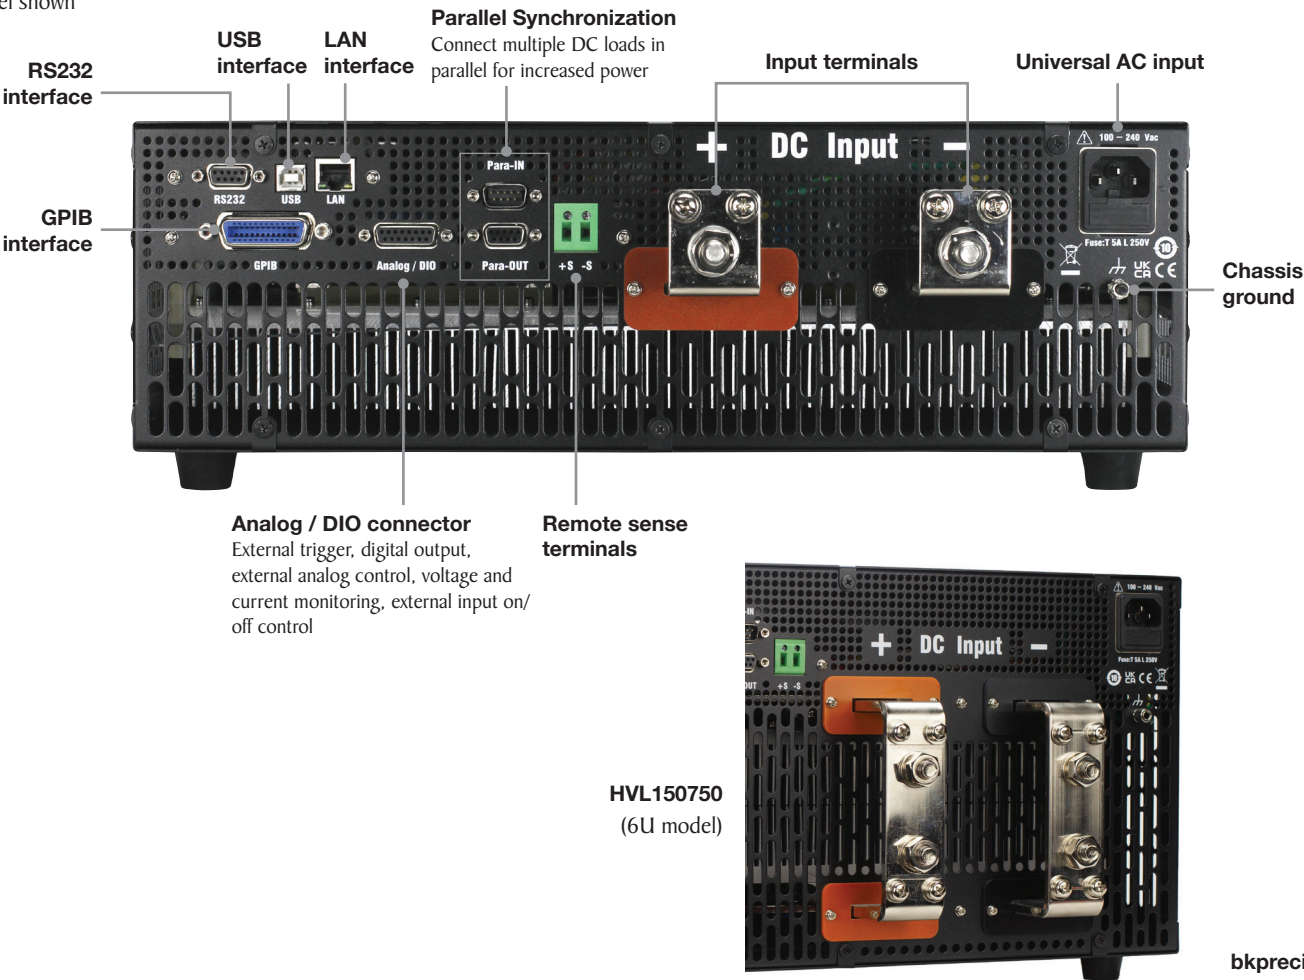

Specifications

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

Model		HVL150250	HVL150480	HVL600150		HVL80075		HVL100025	
Input Ratings									
Input Voltage		0 to 150 V	0 to 150 V	0 to 600 V		0 to 800 V		0 to 1000 V	
Input Current		0 to 250 A	0 to 480 A	0 to 150 A		0 to 75 A		0 to 25 A	
Input Power		2000 W	3000 W	3000 W					
Minimum Operating Voltage		1.5 V	3.0 V	3.5 V		2.0 V		3.5 V	
CV Mode									
Range	Low	0.15 V to 15 V	0.15 V to 15 V	0.5 V to 60 V		0.5 V to 80 V		0.5 V to 100 V	
	High	0.15 V to 150 V	0.15 V to 150 V	0.5 V to 600 V		0.5 V to 800 V		0.5 V to 1000 V	
Programming Readback / Accuracy		±(0.05% + 0.05% FS) ⁽¹⁾							
Resolution		10 mV				100 mV			
CC Mode									
Range	Low	0.25 A to 25 A	0.48 A to 48 A	0.15 to 15 A		0.075 to 7.5 A		0.025 to 2.5 A	
	High	0.25 A to 250 A	0.48 A to 480 A	0.15 to 150 A		0.075 to 75 A		0.025 to 25 A	
Programming Readback / Accuracy		±(0.05% + 0.05% FS) ⁽¹⁾							
Resolution		10 mA						1 mA	
CR Mode									
Range		6 mΩ to 480 Ω	7 mΩ to 300 Ω	Low	High	Low	High	Low	High
				0.03 Ω to 4 Ω	4 Ω to 3.2 kΩ	0.03 Ω to 10.66 Ω	10.66 Ω to 5 kΩ	0.2 Ω to 40 Ω	40 Ω to 10 kΩ
Programming Accuracy ⁽²⁾		Vin > 4.5 V, lin > 0.5 A	Vin > 4.5 V, lin > 0.96 A	lin > 15 A, Rin > 40 mΩ	Vin > 60 V, Gin > 2.6 mS	lin > 7.5 A, Rin > 110 mΩ	Vin > 80 V, Gin > 1.1 mS	lin > 2.5 A, Rin > 400 mΩ	Vin > 100 V, Gin > 0.4 mS
		±(0.2% / Rset + 0.2% x 250 A / Vin)	±(0.2% / Rset + 0.2% x 480 A / Vin)	0.1% + 40 mΩ	0.1% + 2.6 mS	0.1% + 110 mΩ	0.1% + 1.1 mS	0.1% + 400 mΩ	0.1% + 0.4 mS
CW Mode									
Range	Low	4 W to 2000 W	6 W to 3000 W	3 to 300 W					
	High			3 to 3000 W					
Programming Accuracy ⁽³⁾		±(0.2% + 1% FS)							
Resolution		10 mW							
Transient Mode (CC Mode)									
T1 & T2		100 μs to 10 s							
Accuracy		±(5 μs ± 100 ppm)							
Slew Rate ⁽⁴⁾	Low	90 μA/μs to 12 A/μs	0.16 mA/ms to 3000 A/ms	0.05 A/ms to 3000 A/ms		0.025 A/ms to 1500 A/ms		0.008 A/ms to 500 A/ms	
	High								
Minimum Rise Time ⁽⁵⁾		25 μs		100 μs					
External Analog Programming									
VMON Accuracy		± 20 mV							
IMON Accuracy		± 20 mA							
Isolation Voltage		1500 V							
Input Impedance		> 200 kΩ ± 5%							

(1) Applies when set voltage in CV mode or set current in CC mode is greater than 0.2% of full scale.

(2) Accuracy for Low range is specified in resistance (Ω). Accuracy for High range or no range is specified in conductance (S).

(3) Valid when load current > 0.2% and P_{in} > 1% of full scale rating.

(4) The slew rate specifications are not warranted, but are descriptions of typical performance. The actual transition time is defined as the time for the input to change from 10% to 90%, or vice versa, of the programmed current values. In case of very large load changes, e.g. from no load to full load, the actual transition time will be larger than the expected time. The load will automatically adjust the slew rate to fit within the range (high or low) that is closest to the programmed value.

(5) Valid when load current > 4% of full scale and Loop response is set to "Fast".

Specifications

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

Model		HVL150750	HVL600300		HVL800150		HVL100050	
Input Ratings								
Input Voltage		0 to 150 V	0 to 600 V		0 to 800 V		0 to 1000 V	
Input Current		0 to 750 A	0 to 300 A		0 to 150 A		0 to 50 A	
Input Power		6000 W						
Minimum Operating Voltage		1.5 V	3.5 V		2.0 V		3.5 V	
CV Mode								
Range	Low	0.15 V to 150 V	0.5 V to 60 V		0.5 V to 80 V		0.5 V to 100 V	
	High	0.15 V to 150 V	0.5 V to 600 V		0.5 V to 800 V		0.5 V to 1000 V	
Programming Readback / Accuracy		±(0.05% + 0.05% FS) ⁽¹⁾						
Resolution		10 mV			100 mV			
CC Mode								
Range	Low	0.75 A to 75 A	0.3 to 30 A		0.15 to 15 A		0.05 to 5 A	
	High	0.75 A to 750 A	0.3 to 300 A		0.15 to 150 A		0.05 to 50 A	
Programming Readback / Accuracy		±(0.05% + 0.05% FS) ⁽¹⁾						
Resolution		10 mA				1 mA		
CR Mode								
Range		2 mΩ to 200 Ω	Low	High	Low	High	Low	High
			0.015 Ω to 2 Ω	2 Ω to 1.6 kΩ	0.015 Ω to 5.33 Ω	5.33 Ω to 4 kΩ	0.1 Ω to 20 Ω	20 Ω to 5 kΩ
Programming Accuracy ⁽²⁾		V _{in} > 4.5 V I _{in} > 1.5 A	I _{in} > 30 A, R _{in} > 20 mΩ	V _{in} > 60 V, G _{in} > 5.1 mS	I _{in} > 15 A, R _{in} > 55 mΩ	V _{in} > 80 V, G _{in} > 2 mS	I _{in} > 5 A, R _{in} > 200 mΩ	V _{in} > 100 V, G _{in} > 0.6 mS
		±(0.2% / Rset + 0.2% x 750 A / V _{in})	0.1% + 20 mΩ	0.1% + 5.1 mS	0.1% + 55 mΩ	0.1% + 2 mS	0.1% + 200 mΩ	0.1% + 0.6 mS
CW Mode								
Range	Low	12 W to 6000 W	6 to 600 W					
	High		6 to 6000 W					
Programming Accuracy ⁽³⁾		±(0.2% + 1% FS)						
Resolution		10 mW						
Transient Mode (CC Mode)								
T1 & T2		100 μs to 10 s						
Accuracy		±(5 μs ± 100 ppm)						
Slew Rate ⁽⁴⁾	Low	2.5 mA/μs to 37 A/μs	0.1 A/ms to 6000 A/ms		0.05 A/ms to 3000 A/ms		0.017 A/ms to 1000 A/ms	
	High							
Min. Rise Time ⁽⁵⁾		25 μs	100 μs					
External Analog Programming								
VMON Accuracy		± 20 mV						
IMON Accuracy		± 20 mA						
Isolation Voltage		1500 V						
Input Impedance		> 200 kΩ ± 5%						

(1) Applies when set voltage in CV mode or set current in CC mode is greater than 0.2% of full scale.

(2) Accuracy for Low range is specified in resistance (Ω). Accuracy for High range or no range is specified in conductance (S).

(3) Valid when load current > 0.2% and Pin > 1% of full scale rating.

(4) The slew rate specifications are not warranted, but are descriptions of typical performance. The actual transition time is defined as the time for the input to change from 10% to 90%, or vice versa, of the programmed current values. In case of very large load changes, e.g. from no load to full load, the actual transition time will be larger than the expected time. The load will automatically adjust the slew rate to fit within the range (high or low) that is closest to the programmed value.

(5) Valid when load current > 4% of full scale and Loop response is set to "Fast".

Specifications

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

Model	HVL150250	HVL150480	HVL600150	HVL80075	HVL100025	HVL150750	HVL600300	HVL800150	HVL100050
Protection									
Voltage (OVP)									
Range	1.5 V to 160 V	1.5 V to 160 V	0.394 V to 630 V	0.525 V to 840 V	0.656 V to 1050 V	1.5 V to 160 V	0.394 V to 630 V	0.525 V to 840 V	0.656 V to 1050 V
Accuracy	± 0.3 V	± 0.3 V	0.2% + 0.788 V	0.2% + 1.05 V	0.2% + 1.313 V	± 0.3 V	0.2% + 0.788 V	0.2% + 1.05 V	0.2% + 1.313 V
Current (OCP)									
Range	3 A to 275 A	3 A to 528 A	0.098 A to 157.5 A	0.049 A to 78.75 A	0.016 A to 26.25 A	3 A to 820 A	0.197 A to 315 A	0.098 A to 157.5 A	0.033 A to 52.5 A
Accuracy	± 0.5 A	± 0.96 A	0.2% + 0.197 A	0.2% + 0.098 A	0.2% + 0.033 A	± 1.5 A	0.2% + 0.394 A	0.2% + 0.197 A	0.2% + 0.066 A
Over Current Limit (OCL)									
Range	12.5 A to 275 A	24 A to 528 A	-			37.5 A to 820 A	-		
Accuracy	± 2.5 A	± 4.8 A	-			± 7.5 A	-		
Over Power Limit (OPL)									
Range	100 W to 2200 W	100 W to 3300 W	-			200 W to 6600 W	-		
Accuracy	±(0.2% + 20 W)	±(0.2% + 30 W)	-			±(0.2% + 60 W)	-		
Under Voltage Lockout (UVL)									
Range	0.15 V to 135 V	0.15 V to 135 V	0.45 V to 600 V	0.6 V to 800 V	0.75 V to 1000 V	0.15 V to 135 V	0.45 V to 600 V	0.6 V to 800 V	0.75 V to 1000 V
Accuracy	± 0.3 V	± 0.3 V	2.5% + 0.75 V	2.5% + 1 V	2.5% + 1.25 V	± 0.3 V	2.5% + 0.75 V	2.5% + 1 V	2.5% + 1.25 V
Reverse Connection (RCP)	Reverse current > 2.5 A	Reverse current > 4.8 A	-			Reverse current > 7.5 A	-		
General									
Input Resistance (Load off)		> 50 kΩ							
AC Input		100 VAC to 240 VAC ± 10%, 47 to 63 Hz							
Temperature	Operating	41 °F to 104 °F (5 °C to 40 °C)							
	Storage	14 °F to 140 °F (-10 °C to 60 °C)							
Dimensions (H x W x D)		5.24" x 16.87" x 26.18" (133 x 428.4 x 665 mm)				8.74" x 16.87" x 24.21" (222 x 428.4 x 615 mm)			
Weight		51.6 lbs (23.4 kg)	56 lbs (25.2 kg)	48.5 lbs (22 kg)		92.4 lbs (41.9 kg)	73.8 lbs (33.5 kg)		
Warranty		3 Years							
Standard Accessories		Power cord, removable input protection cover, rack-mount brackets with handles and certificate of calibration							
Regulatory Compliance									
Safety		Low Voltage Directive (LVD) 2014/35/EU, EN61010-1:2010+A1:2019, cTUVus certification mark ⁽⁴⁾ fulfills US (UL 61010-1:2012) and Canadian (CAN/CSA-C22.2 NO. 61010-1-12) safety standards							
Electromagnetic Compatibility		EMC Directive 2014/30/EU, EN61326-1:2021							

(6) Tested and certified by a Nationally Recognized Testing Laboratory (NRTL), accredited by OSHA.

About B&K Precision

For more than 75 years, B&K Precision has provided reliable and value-priced test and measurement instruments worldwide.

Our headquarters in Yorba Linda, California houses our administrative and executive functions as well as sales and marketing, design, service, and repair. Our European customers are most familiar with B&K through our French subsidiary, Sefram. Engineers in Asia know us through our B&K Precision Taiwan operation. The independent service centers in Singapore and Brasil service customers in Singapore, Malaysia, Vietnam, Indonesia and South America, respectively.



● B&K Precision group member ● Independent service center ● Service center location

Quality Management System

B&K Precision Corporation is an ISO9001 registered company employing traceable quality management practices for all processes including product development, service, and calibration.

ISO9001:2015

Certification body NSF-ISR
Certificate number 6Z241-ISR



Video Library

View product overviews, demonstrations, and application videos in English, Spanish and Portuguese.

<http://www.youtube.com/user/BKPrecisionVideos>

Product Applications

Browse all of our supported product and mobile applications.

<http://bkprecision.com/product-applications>